

Network Video Recorder

Version: V5.04.065 build250530

Release Note

Firmware Basic Information	Firmware Version:	V5.04.065_build250530
	SDK Version:	6.1.9.48
	Play Library:	6.0.1.52
	Web component:	V5.1.12_R0102build250522
	OpenSDK Version:	2.15.3 (Ezviz), 2.14.1 (OTAP)

Reason of Upgrade

Add new features, fix known defects, and optimize product performance.


New Features

1. Support to add 4G & non-4G Hikvision IP camera (non-solar models) whose support ISUP5.0 protocol;

It can support to do live view, video&audio parameter configuration, recording schedule, two-way audio, remote PTZ control, receive alarms, update (online update, local update, FTP update), sync time, jump to web for the IP camera.

Note:

- a. No support to configure/batch configure these IP camera's IP address;
- b. No support the dynamic mosaic function if adding via ISUP5.0 even when IP camera support dynamic mosaic by themselves.

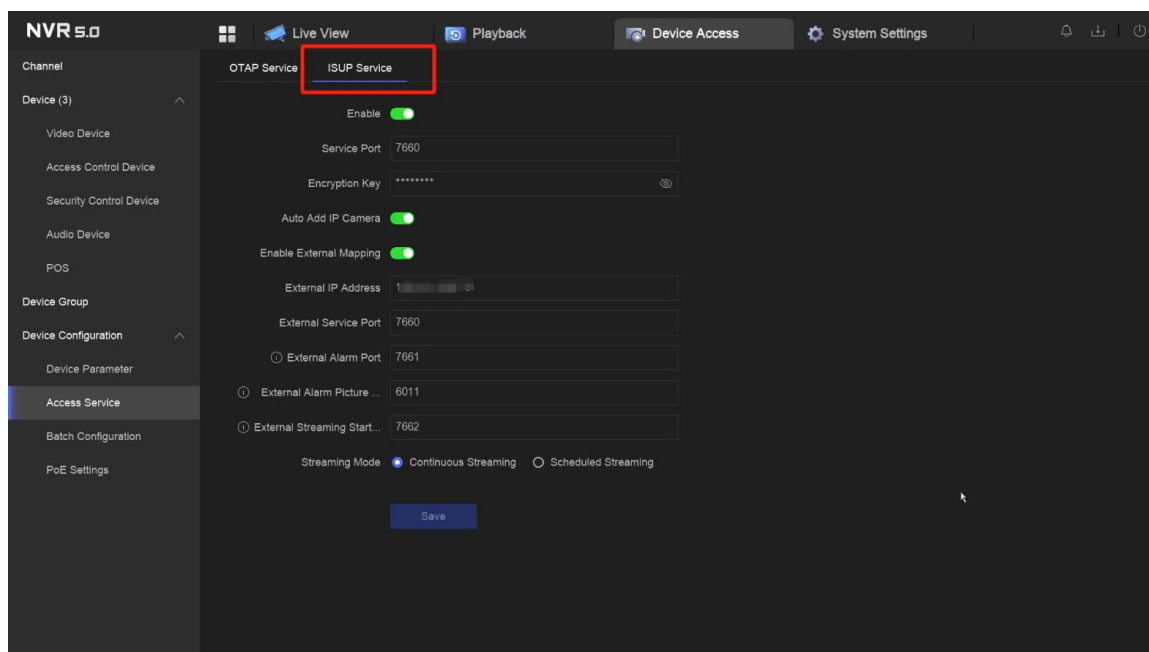

NVR 5.0

Live View Playback Device Access System Settings

Channel

Device (3)

Video Device

Access Control Device

Security Control Device

Audio Device

POS

Device Group

Device Configuration

Device Parameter

Access Service

Batch Configuration

PoE Settings

+ Add - Delete Export Import More Show Password

2 device(s) connected.

Device Name	IP Address	Status	Added Channel	Number of Channels	Password Strength	Password	Protocol Type	Management Port	Operation
POE 1	192.168.254.7	Connected	D1	1	Weak Password	*****	HIKVISION	8000	
Camera 01	FA1...124	Online	D2	1	Very Weak	*****	ISUP	7660	

Online Device List (1)

+ Quick Add One-touch Activate Refresh More

IP Address	Device Model	Status	Protocol Type	Management Port	Serial No.	Version	Operation
192.168.0.100	DS-7...E	Online	HIKVISION	8000	DS-7...4	2	

NVR 5.0

Live View Playback Device Access System Settings

Resource Target

29-04-2025 Tue 16:38:26

Channel

Please enter.

Default Group

[D2]Camera 01

View

Default View

Custom View


Camera 01

HIKVISION

HIKVISION



HIKVISION

< 1/1 > [Icons]

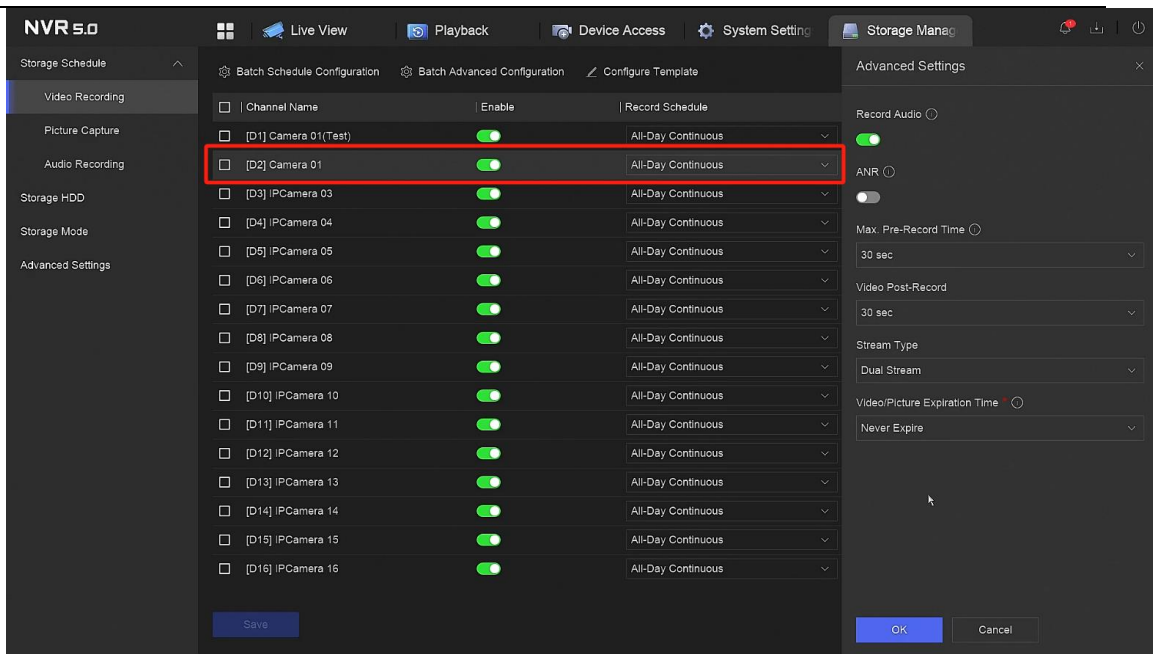

2. Support configure arming/disarming schedules on HC, auto arm/silent arm/disarm each channel at specific time (hour:minute) ;

Note: It will support holiday schedule when Hik-Connect new version 6.9.300 released.

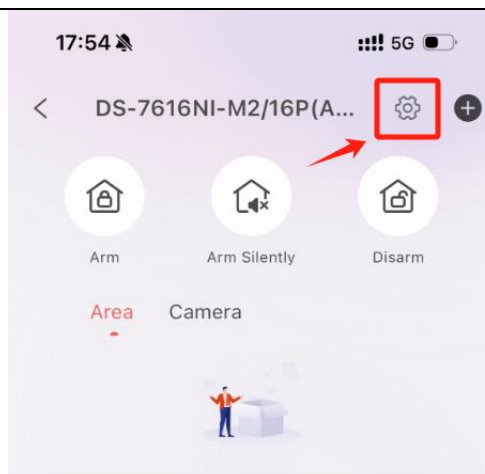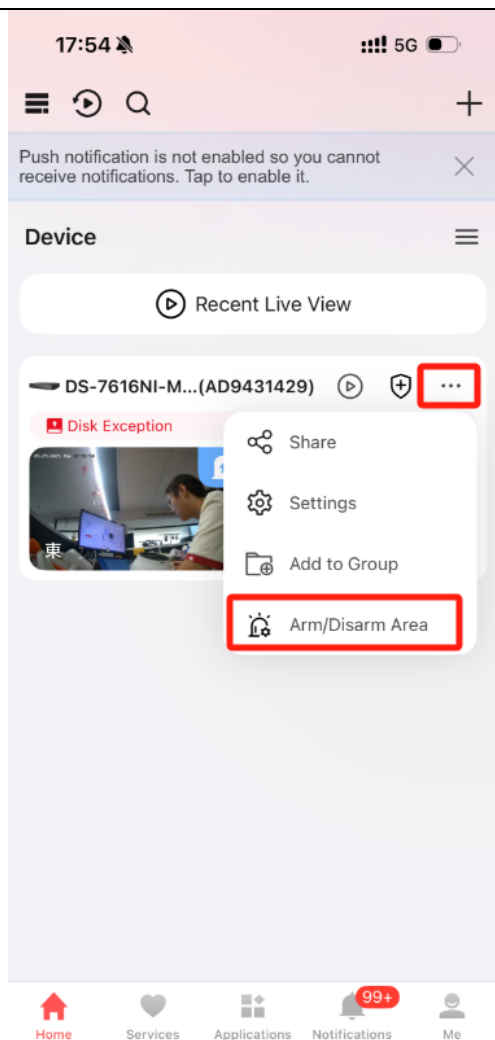


1 What is an area?


After adding cameras to an area, you can batch arm/disarm the cameras quickly. To add an area, tap the **+** button on the upper right corner or tap Add Area at the bottom.

2 How to quickly arm/disarm cameras in an area?

Tap the area card, and select Arm, Arm Silently, or Disarm in the pop-up window at the bottom to quickly arm/disarm the cameras in it.

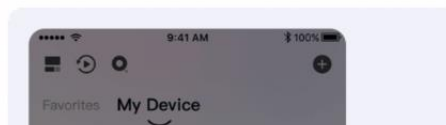


Add Area

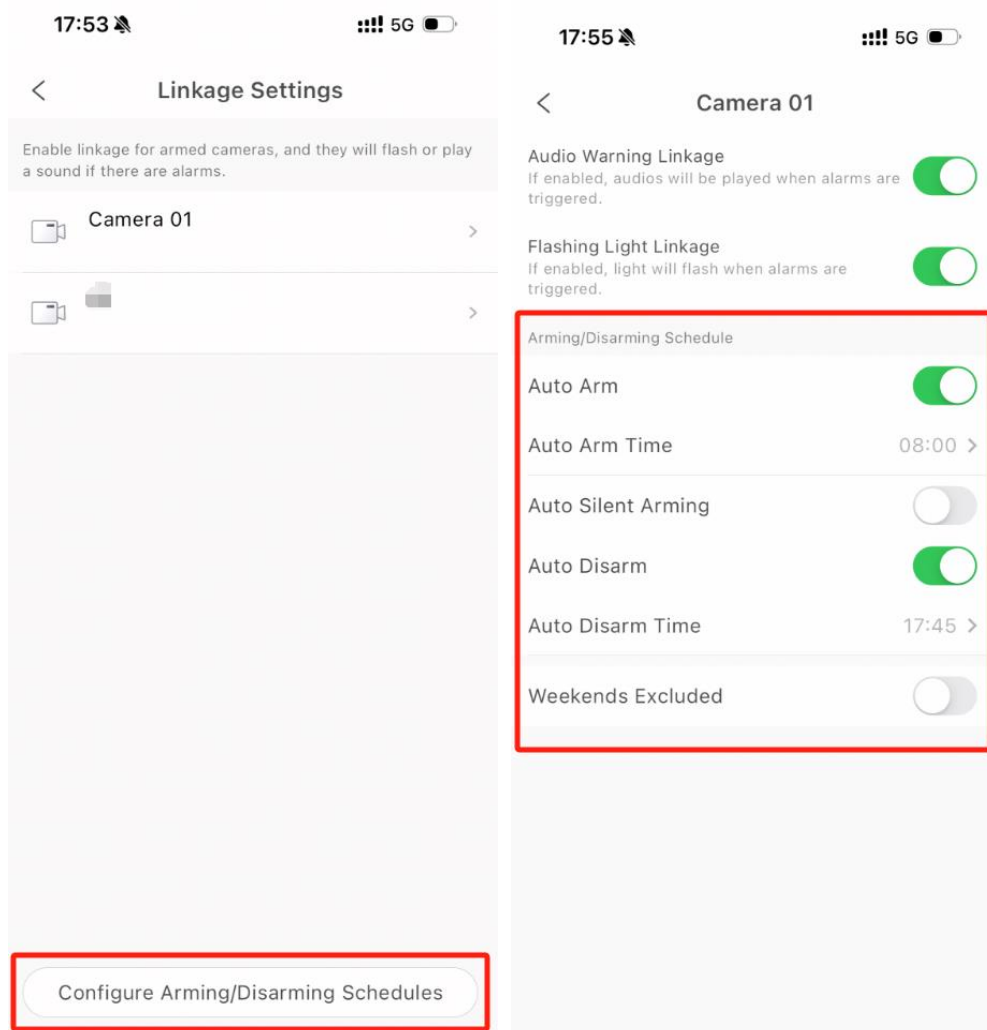

3. Support to add high frame rate IP camera via Hikvision protocol;


Support to add Hikvision 2MP @120/100fps, 8MP @50/60fps, 4MP @50/60fps IP cameras, it can configure video&audio parameter, full frame rate video recording and exporting, local/remote live view and playback.



Note: High frame rate is conflict to smart function.

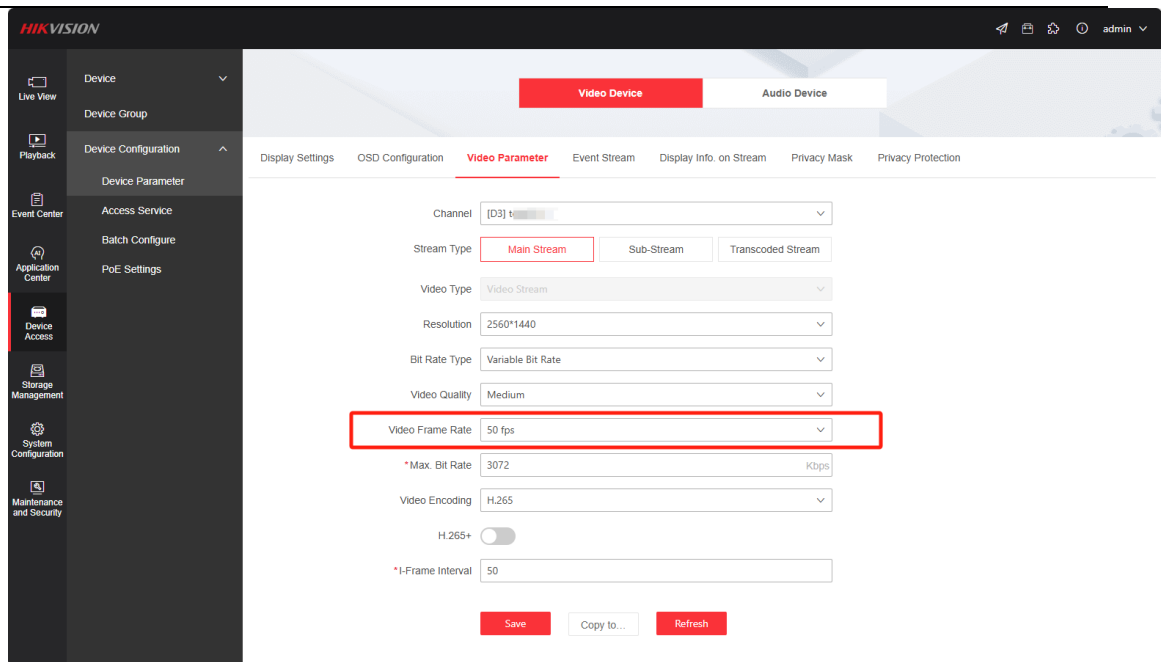



- Support to add multi-channel IP cameras via POE, you can add the other channels under Video Device menu;

Note: Only support from local GUI, not support on web.

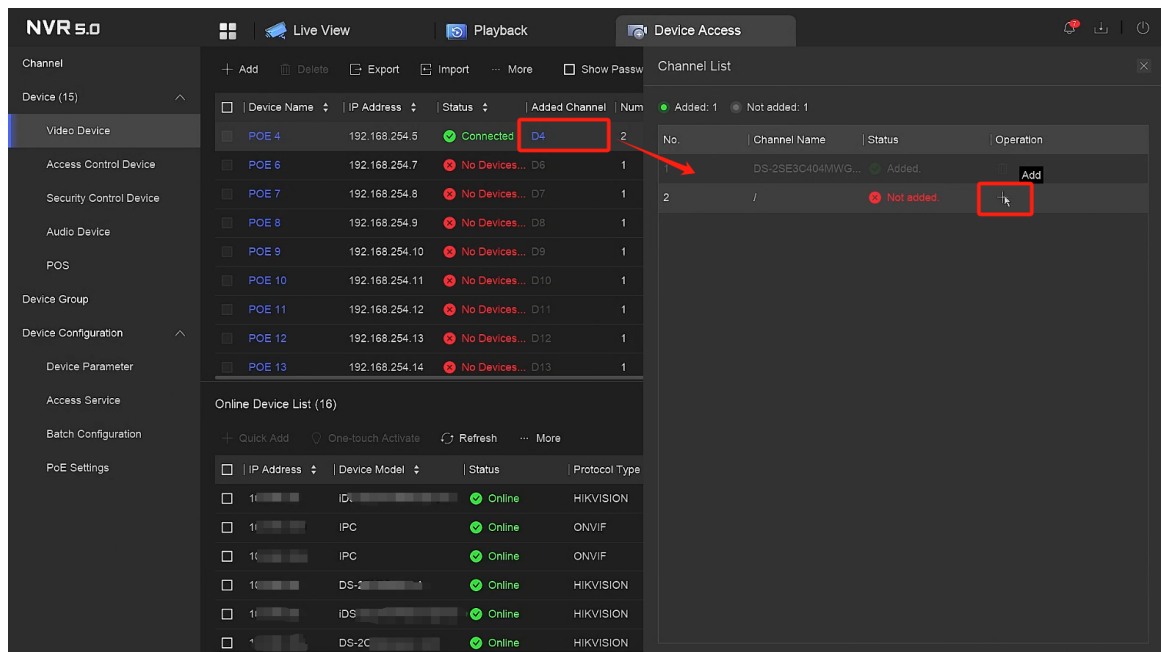

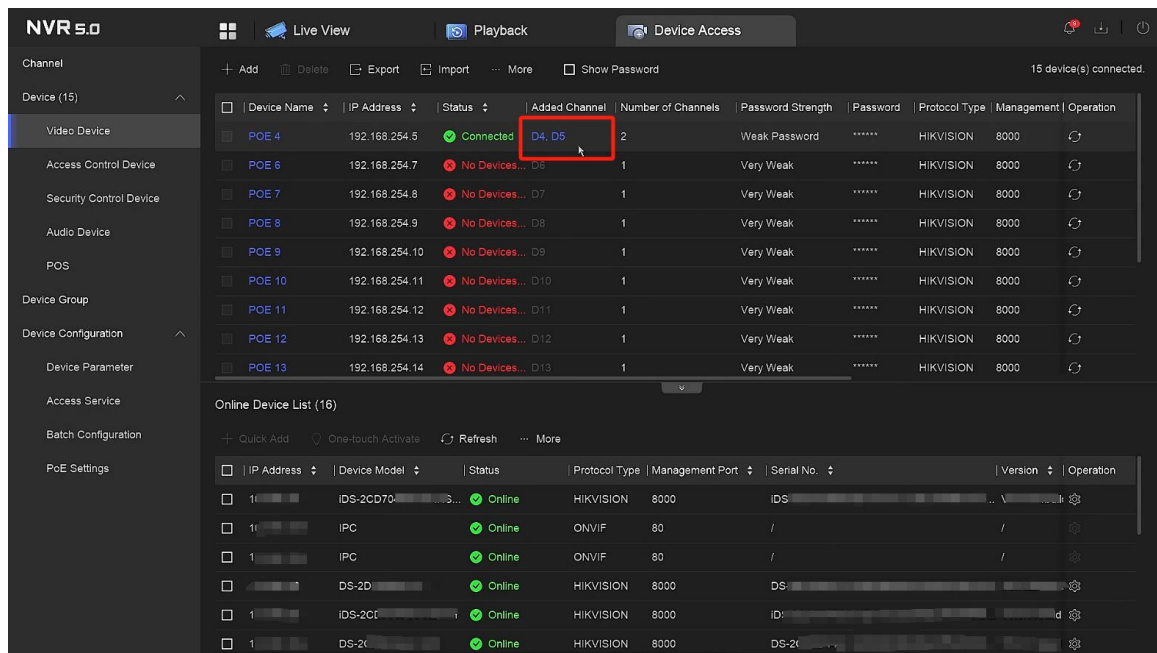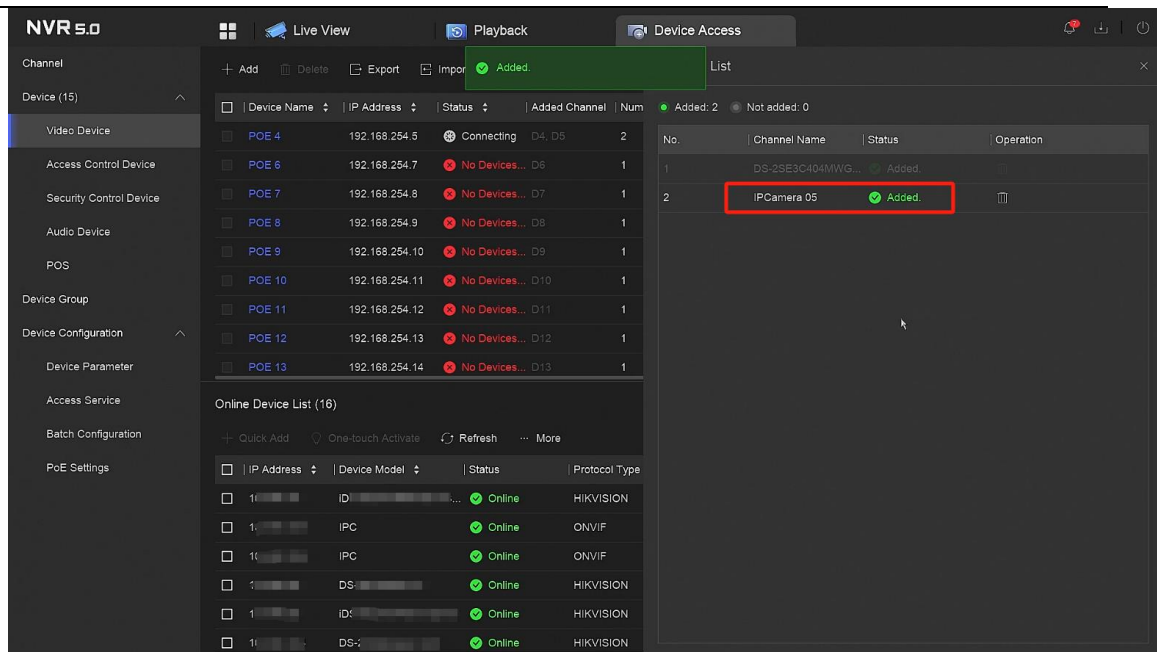

- Support to attach 3 images for perimeter protection when choosing to send alarm email;

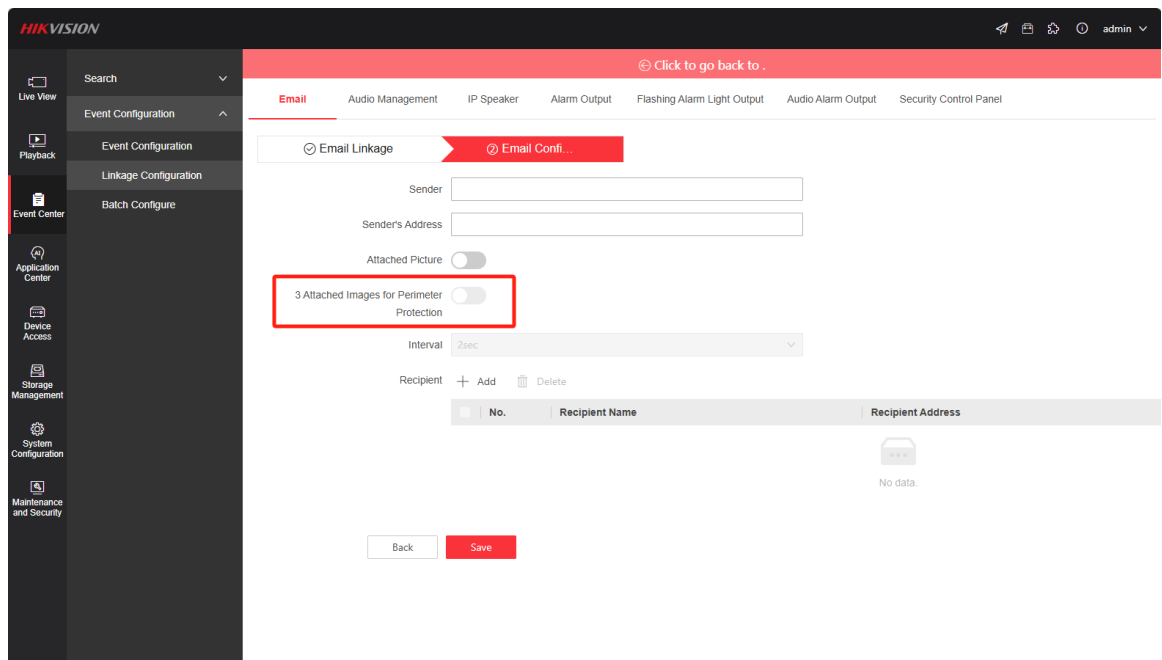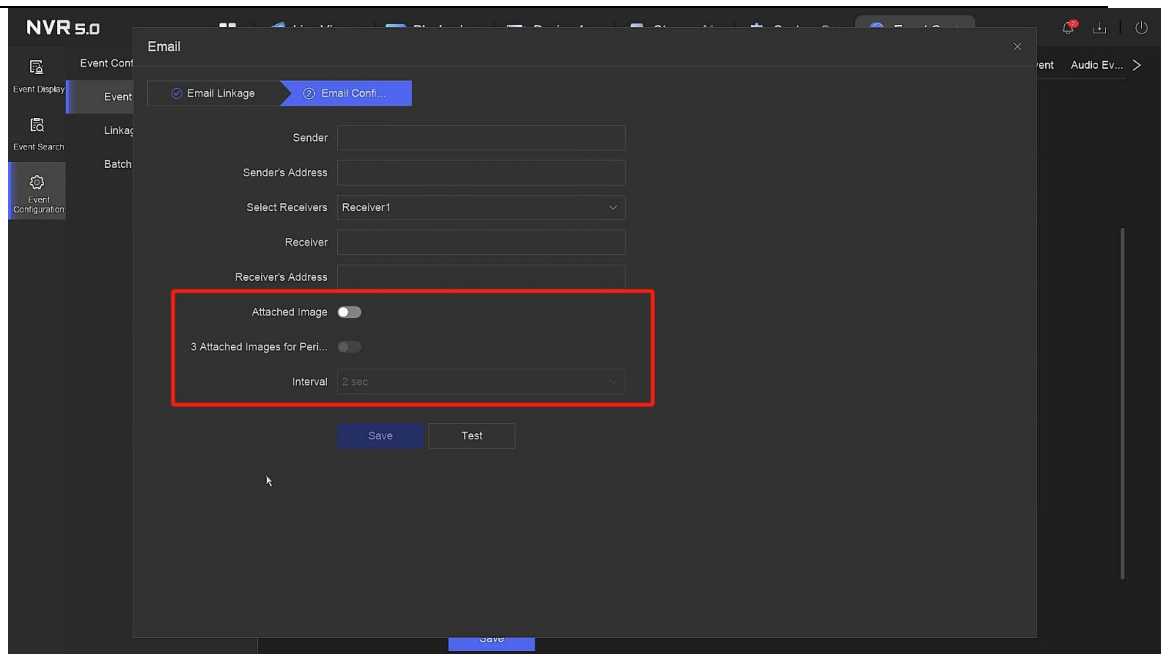

Modified functions

NA



First Choice for Security Professionals

Customer Impact and Recommended Action

This new firmware upgrade is to improve product performance, and will take effect automatically after upgrading from previous versions. We'd like to inform you the above changes. Also, we are sorry for any possible inconvenience of use-habit changes caused by this action.

For questions or concerns, please contact our local technical support.

Note:

- Hikvision has all rights to alter, modify and cancel this notice.
- Hikvision doesn't give any guarantee for old models' stock.
- Hikvision is not liable for any typing or printing errors.
- For special model's change details, please contact our local technical support team.